

COBRA HEAD¹²⁶




LIGHT HAS NEVER BEEN THIS POWERFUL

QUALITY

PERFORMANCE

RELIABILITY

- High Quality LED Chips from CREE
- Energy Saving, Environmentally Friendly, Long Lifespan
- Made of Aluminium Alloy, Excellent Heat Conductivity
- Applied with Patented Quadric Optics Non-Imaging Lens, Luminaire Efficiency Over 90%
- Powered at AC Board Voltage Input With Constant Current Drive
- The Lamps Has Been Designed a passive ventilation system to Ensure the Dust Resistance, Water Resistance and Self Cleaning Ability
- Aesthetic Style

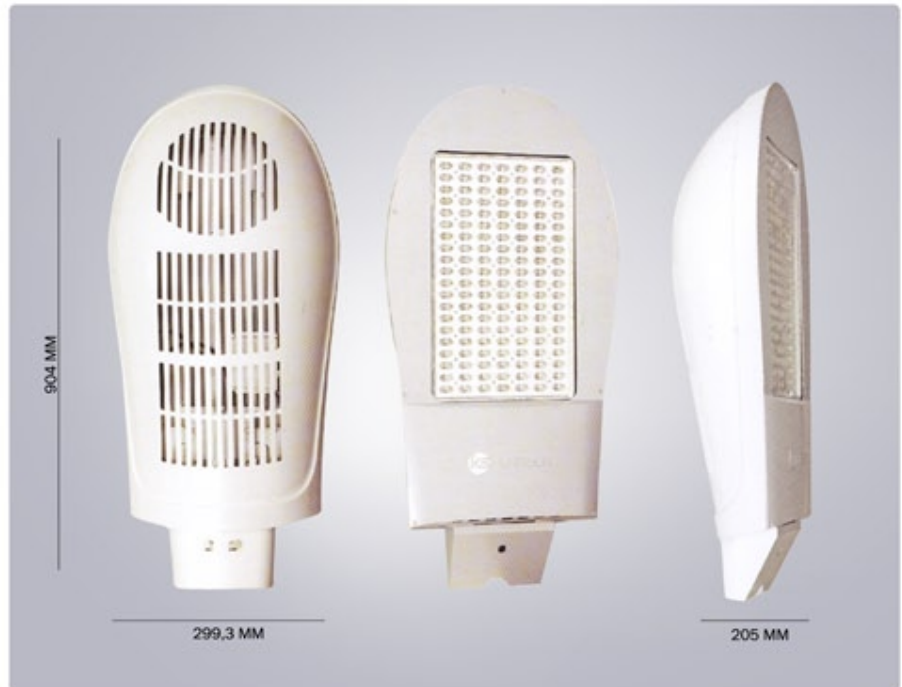

LTILED.COM

➤ TOOL FREE/ 1 888.401.3865
WEB/ WWW.LTILED.COM

FAX/ 1.877.864.3659
MAIL/ INFO@LTILED.COM

COBRA HEAD¹²⁶

OUR SUPERIOR HIGH-POWER TECHNOLOGY



TYPICALS APPLICATIONS

- > Express Way
- > Branch Road, Urban Road
- > Major Road, Local Road

Output Voltage	DC53V
Input Voltage	AC 170 - 250 V 50 - 60 Hz
Power Factor	> 0.95
Total Harmonic Distortion	< 15%
Power Efficiency	94 %
LED Consumption	126 W
System Consumption	134 W
Luminaire Efficiency	>90Lm/W
LED Initial Flux	12690 Lm
LED luminous efficiency	> 90%
Color Temperature	5000K - 5500 K
Color Rendering Index (CRI)	Ra > 75
Light Distribution Curve	Asymmetric (Bat Wing) Rectangular Beam
Junction Temperature (Tj)	< 75°C
Operating Environment	temps. -40°C to 50°C humidity 10% - 95%
IP Rating	IP66
Life Time	100 000 hours at TA = 30°C at more than 70% initial flux
Material	Aluminium Alloy
Average Illumination	6 meters / > 49.4 Lux 8 meters / > 29.6 Lux 10 meters / > 17.8 Lux 12 meter / > 12.3 Lux
Effective Illuminated Area	6 meters / 7 x 21m² 8 meters / 9.6 x 28m² 10 meters / 12 x 35m² 12 meter / 14.4 x 42m²
Installation	Connect to a Ø 60mm arm branch
Net Weight	15.5 Kg